Surface / Wall Device **Charging Station Guide**

WARNING: Two people are required to attach this charging station to a wall.

Parts List Note: Hardware provided is for drywall installation. If attaching to other material fasteners are to be furnished by other.











Tools Required

- 1/4" Drill Bit (No Stud)

- 1/8" Drill Bit (Stud)

Level

- Drill

- Tape Measure - Extended Drive Phillips
 - Level
 - Stud Finder


06/22/15

- Pencil




Plastic Anchor

Surface Mount

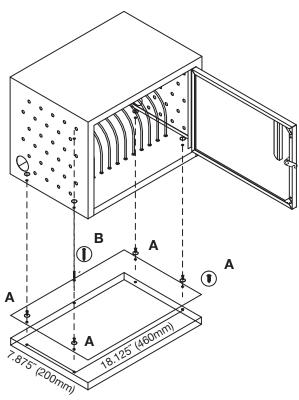

- 1. Place the unit in the desired location.
- 2. Using a pencil, mark the front two holes.
- 3. Using a pencil, mark the back two holes through the side grommet holes.
- 4. Remove the unit, and confirm marks are in the correct location (18.125 left to right, and 7.875 front to back).
- 5. Mark a center point between the back two holes.
- 6. Drill 5 holes using the 1/8" drill bit.
- 7. Return the unit, and secure in place with screws (**A** and **B**).

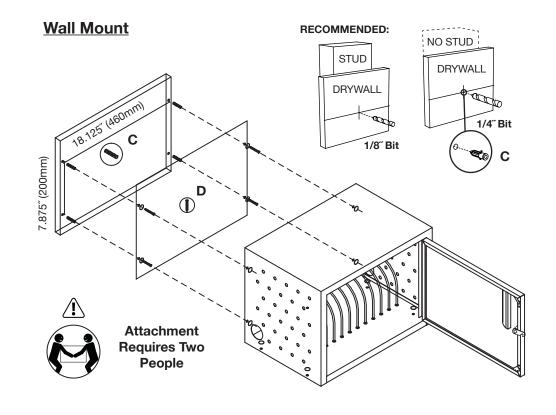

Assistance required on all steps

- 1. Place the unit in the desired location.
- 2. Level the unit, and hold in place.
- 3. Mark the top 2 holes with a pencil.
- 4. Mark the bottom 2 holes with a pencil through the grommet holes.
- 5. Remove the unit, and confirm holes are in the correct location (18.125 left to right, and 7.875 top to bottom).
- 6. If mounting to drywall, drill holes with the 1/4" drill bit, and place anchors (C) in the holes
- 7. If mounting to a stud, drill holes with 1/8" drill bit
- 8. Return the unit to the location, and secure in place with screws (**D**).